

SLZ 850 E

Cycle control:

Heidenhain MANUALplus 620 or Siemens 840D SolutionLine with user interface Operate with manual functions

Specifications and performance

Specifications

SLZ 850 E	Unit	Value
Swing over bed	mm	850-1.000
Swing over cross slide	mm	490-640
Bed width	mm	560
Spindle head in accordance with DIN 55027	size	15
Spindle bore \varnothing	mm	130/530 (Option)
Spindle \varnothing in the front bearing	mm	220/670 (Option)
Tailstock quill \varnothing	mm	160
Tailstock stroke	mm	315
Tailstock Morse taper	MK	6
Center distance	m	1,0-16,0

Performance

SLZ 850 E	Unit	Value
Main drive	KW	46
Speed range	1/min	1-1.200

Dimensions

Length	mm	3.800 +Center Distance
Width	mm	3.060
Height	mm	2.550

Please note:



Box-type bed machine with double prism guide





Thermal separation between headstock and gearbox for greater precision



Very good machine access and operation

Plus control cabinet of approx. 500 x 2000 mm

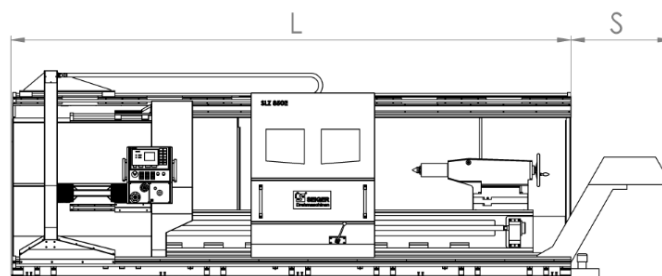

Technical changes and errors excepted