

SLZ 300 SK

Controls:

Heidenhain 620 manual control with mechanical handwheels

Specifications and performance

Specifications

SLZ 300 SK	Unit	Value
Swing over bed	mm	300
Swing over cross slide	mm	150
Bed width	mm	240
Spindle head in accordance with DIN 55027	size	5
Spindle bore \varnothing	mm	40/55 (Option)
Spindle \varnothing in the front bearing	mm	70/90 (Option)
Tailstock quill \varnothing	mm	50
Tailstock stroke	mm	125
Tailstock Morse taper	MK	3
Center distance	m	0,75

Performance

SLZ 300 SK	Unit	Value
Main drive	KW	11,5
Speed range	1/min	1-3.000

Dimensions

Length	mm	2.000
Width	mm	1.800
Height	mm	1.850

Please note:





Good accessibility and operation of the machine



No energy chain in chip and Water area



Stainless steel cladding in the permanent cutting area

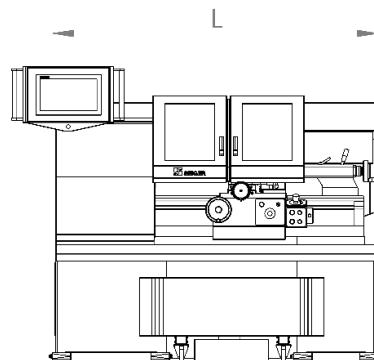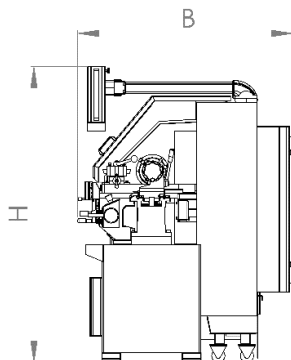

Technical changes and errors excepted