

SLZ 300 E

Cycle control:

Heidenhain MANUALplus 620 or Siemens one with user interface Operate with manual functions

Specifications and performance

Specifications

SLZ 300E	Unit	Value
Swing over bed	mm	300
Swing over cross slide	mm	150
Bed width	mm	240
Spindle head in accordance with DIN 55027	size	5
Spindle bore $\varnothing$	mm	40/55 (Option)
Spindle $\varnothing$ in the front bearing	mm	70/90 (Option)
Tailstock quill $\varnothing$	mm	50
Tailstock stroke	mm	125
Tailstock Morse taper	MK	3
Center distance	m	0,75

Performance

SLZ 300E	Unit	Value
Main drive	KW	11,5
Speed range	1/min	1-4.500

Dimensions

Length	mm	2.000
Width	mm	2.000
Height	mm	1.850

Please note:




Good machine access and operation



Direct position measurement on the X-axis



Stainless steel paneling in the permanent cutting zone

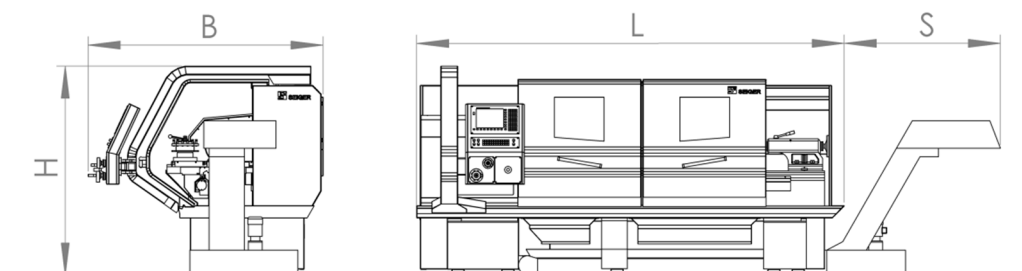

Technical changes and errors excepted